


# MMS 4004

MATRIX MIXER




## Audio Matrix Control Unit for 4 inputs into 4 outputs


- Provides fast and simple zone configuration, eliminating the need for complicated relay wiring

- Constant monitoring of inputs and outputs on VU meter and headphones
- 19" Rack mounting, 1U high

Setting combinations for MMS 4004 Matrix Mixer

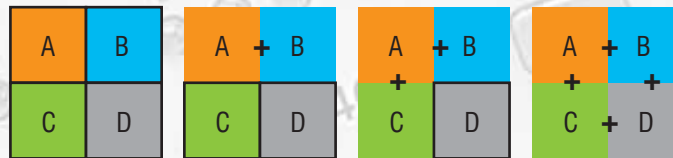

- Room A
- Room B
- Room C
- Room D

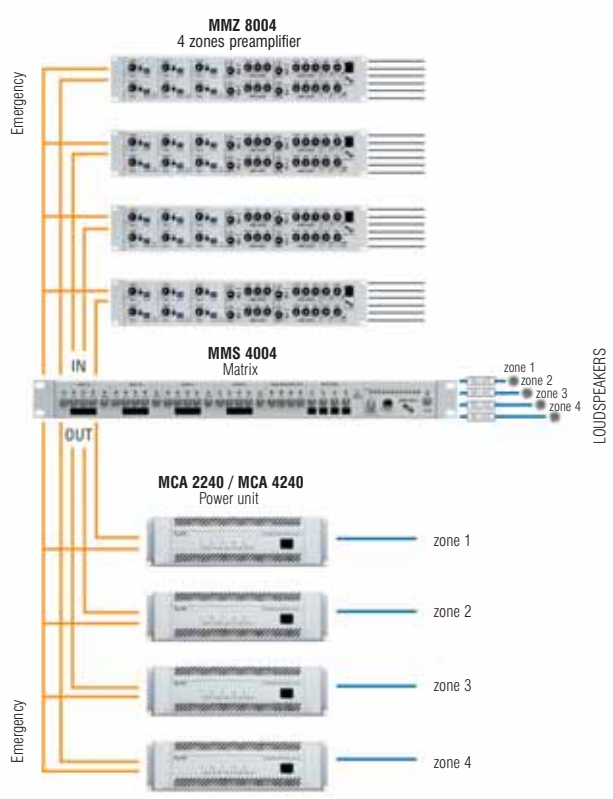

MMS 4004	
<b>Characteristics</b>	19" rack mounting, 1U high with RAL 7035 grey paint finish
<b>Inputs</b>	4 balanced
<b>Outputs</b>	4 balanced
<b>Max. Signal for input/Z</b>	22 dBu balanced/10 kohm
<b>Max. Output signal/Z</b>	28 dBu balanced/600 ohm
<b>Monitor output</b>	6.3mm stereo jack socket for terminal board shield for loudspeaker on rear panel
<b>Emergency</b>	Terminal board for emergency circuit activation
<b>Controls</b>	Routing of each input to each output of the 4 zones Pre-listening for each Monitor input on the 4 zones
<b>Power supply</b>	230V AC with external power supply unit 120V AC with external power supply unit
<b>LED indicators</b>	Selected output indicator Monitor-Emergency-Monitor out for each VU output meter-power ON-OFF
<b>Insert</b>	6.3mm stereo jack socket on each output
<b>Weight</b>	2.6kg
<b>Dimensions</b>	482 x 44x 212mm (1U Rack)