

NXA4-400

DIGITAL AUDIO MANAGERS

Powered Digital Audio Manager



PRODUCT OVERVIEW

NXA4-400 is a 4 channel self-powered digital manager that stays halfway between a digital matrix and a multichannel amplifier. An "all-in-one" digital audio device that becomes a complete audio solution, including several remote control options and a long list of smart features.

KEY FEATURES

- 4 analogue audio inputs x 4 powered audio outputs
- Class D amplifiers (eco friendly)
- Auto stand-by function (eco friendly)
- 100% silent (fanless convection cooling system)
- Health self-test mode function, with FAULT RELAY (for an external redundancy system)
- Integrated anti-clip system
- Integrated DSP processor. Main features:
 - Inputs mixer independent per channel (all inputs available)
 - VOLUME, MUTE, SOLO, PHASE INVERSION, MAX. VOL limit and MIN.VOL limit, LP and HP Crossover filters, parametric EQ filters bank, Ducker, Delay, Compressor and more settings configurable per channel.
 - Ethernet interface, compatible with EclerNet Manager platform and UCP remote control system
 - TP-NET third-party remote control (compatible with CRESTRON®, AMX®, RTI®, VITY®, etc.)


APPLICATIONS

- Live sound
- Centralized, distributed or hybrid fixed installation
- Integration in installation global control systems
- Big Public Address zoned systems
- Installations requiring remote supervision, diagnostic and adjustment via Internet

CERTIFICATIONS

- EN60065:2014
- EN55103-1:2009
- EN55103-2:2009
- 2006/95/EC
- 2004/108/CE

MECHANICAL DIAGRAMS

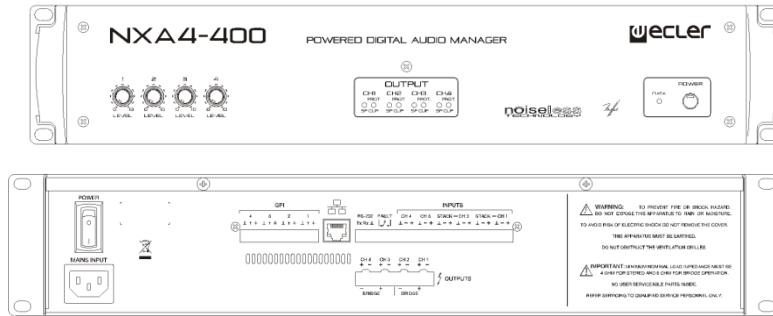

TECHNICAL DATA

| | |
|---|---|
| Power 20Hz-20kHz 1% THD | |
| 1 Channel @ 4Ω | 426 WRMS |
| 1 Channel @ 8Ω | 230 WRMS |
| All Channels @ 4Ω | 330 WRMS |
| All Channels @ 8Ω | 205 WRMS |
| 1 Bridge channel @ 8Ω | 760 WRMS |
| Overall Voltage Gain | +26 / +32 dB |
| Frequency response (-1dB, -3dB) | 10Hz – 25kHz |
| THD + Noise @ 1kHz Full power | <0.08% |
| Noise Floor (FFT) 20Hz – 20KHz | >100dB (110dB typ.) |
| Damping factor 1kHz @ 8Ω | >600 |
| Channel Crosstalk @ 1kHz | >75dB |
| Input connectors | Terminal block (Symmetrical) |
| Input CMRR/ref. Max. PWR | >50dB |
| Signal present indicator | Lit at -40dBV |
| Output connectors | Terminal block |
| Anticlip limiter | Soft / Mid / Hard |
| Volume remote control | (0-10VDC) (0.1A max.) 0V = no attenuation / +10V = full attenuation |
| Remote control connectors | Terminal block |
| Mains | Depending on your country. See characteristics in the back of the unit. |
| Power consumption | |
| (pink noise, 1/8 power @ 4ohm) | 431VA |
| (pink noise, 1/3 power @ 4ohm) | 948VA |
| Stand-by mains consumption | <3W |
| Panel Dimensions | 482.6x88mm |
| Depth (Handles and knobs excluded) | 373mm |
| Weight | 15.6kg |
| Processing | |
| A/D & D/A | 24 bit, 48kHz. 115dB AKM Codec |
| DSP | 32/64 bits |
| Latency | 2ms |
| Analog Input headroom | +18 dBV = +21dBu |
| Digital Input attenuator | Stepless from -∞ to +0dB |
| Input Impedance | Balanced, 22kΩ |
| Maximum Delay | 1s (343.4m) for each channel |
| Delay resolution | 20.8μs (6mm) |
| Compressor / Limiter | |
| Threshold | from -36dBV to +18dBV |
| Ratio | 1:1 to ∞:1 (limiter) |
| Attack time | Auto or from 0.1ms to 500ms. |
| Release time | Auto or from 1ms to 5s. |
| Output peak voltage limiter | |
| Peak voltage upon model (auto settings) | From 10Vpk to 70Vpk |
| High & Low pass Crossover filters | Butterworth in 6/12/18/24dB/oct. Bessel in 12/18/24dB/oct. Linkwitz-Riley in 12/24dB/oct. |
| Parametric Eq types (8 max. per output) | Bypass / On-Off all channels Param. Eq. 20Hz-20kHz; -60/+12dB; Q from 0.3 to 200 Low & High Shelf 6/12 dB/oct |

| | |
|---|--|
| | Low & High Pass 6/12 dB/oct. All-Pass 1/2 order Sine (20Hz to 20kHz) Polarity (10/20Hz to 10/20kHz) White Pink |
| Built In signal generator | |
| Signal Mute | Yes |
| Signal Polarity Invert | Yes |
| Connectivity | Ethernet Base-Tx 10/100Mb, Auto X-Over, Cat5 RS232 57600 (fixed)-8-N-1-N |
| Software | <p>Realtime full GUI of all functions and controls through Ethernet with interactive graphical display</p> <p>Grouping mode channels or devices</p> <p>Automated report generation</p> <p>Remote power on with programmable delay.</p> <p>Up to 256 devices on same net.</p> <p>Autodiscovery devices feature</p> <p>Routing capability through NAT gateways.</p> <p>Real time metering at input/output (DSP)</p> <p>EclerNet Software</p> <p>Device "Finder" feature</p> <p>Save & Recall setup and preset functions</p> <p>Firmware update capability thru Ethernet</p> <p>Password protection</p> <p>Default Network configuration:</p> <p>IP: 192.168.0.100</p> <p>Mask: 255.255.255.0</p> <p>Gate: 192.168.0.1</p> <p>UDP Port: 2210</p> |
| Operating System | Windows® 10; W8.1; W8; W7; Vista (SP1); XP Prof. (SP3); W2000 Prof. (SP4) Pentium IV @ 2GHz 500MB RAM |
| Minimum EclerNet System Requirements | 100MB HDD free space 1024x768 pixels & 16bits color display 10/100/1000 Ethernet Network card |