

NXA6-200

DIGITAL AUDIO MANAGERS

Powered Digital Audio Manager



PRODUCT OVERVIEW

NXA6-200 is a 6 channel self-powered digital manager that stays halfway between a digital matrix and a multichannel amplifier. An "all-in-one" digital audio device that becomes a complete audio solution, including several remote control options and a long list of smart features.

KEY FEATURES

- 6 analogue audio inputs x 6 powered audio outputs
- Class D amplifiers (eco friendly)
- Auto stand-by function (eco friendly)
- 100% silent (fanless convection cooling system)
- Health self-test mode function, with FAULT RELAY (for an external redundancy system)
- Integrated anti-clip system
- Integrated DSP processor. Main features:
 - Inputs mixer independent per channel (all inputs available)
 - VOLUME, MUTE, SOLO, PHASE INVERSION, MAX. VOL limit and MIN.VOL limit, LP and HP Crossover filters, parametric EQ filters bank, Ducker, Delay, Compressor and more settings configurable per channel.
 - Ethernet interface, compatible with EclerNet Manager platform and UCP remote control system
 - TP-NET third-party remote control (compatible with CRESTRON®, AMX®, RTI®, VITY®, etc.)


APPLICATIONS

- Live sound
- Centralized, distributed or hybrid fixed installation
- Integration in installation global control systems
- Big Public Address zoned systems
- Installations requiring remote supervision, diagnostic and adjustment via Internet

CERTIFICATIONS

- EN60065:2014
- EN55103-1:2009
- EN55103-2:2009
- 2006/95/EC
- 2004/108/CE

MECHANICAL DIAGRAMS

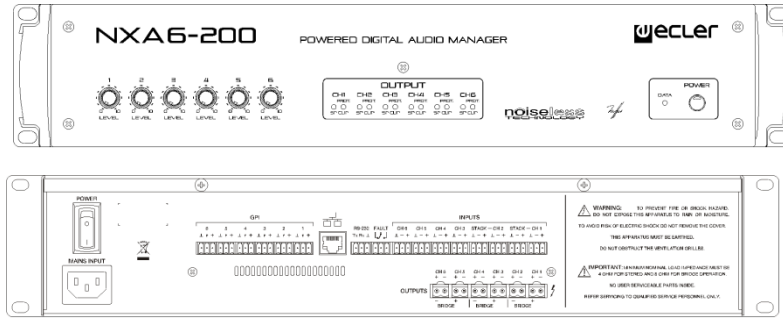

TECHNICAL DATA

Power 20Hz-20kHz 1% THD	
1 Channel @ 4Ω	218 WRMS
1 Channel @ 8Ω	126 WRMS
All Channels @ 4Ω	163 WRMS
All Channels @ 8Ω	105 WRMS
1 Bridge channel @ 8Ω	395 WRMS
Overall Voltage Gain	+26 / +32 dB
Frequency response (-1dB, -3dB)	10Hz - 25kHz
THD + Noise @ 1kHz Full power	<0.08%
Noise Floor (FFT) 20Hz - 20KHz	>100dB (110dB typ.)
Damping factor 1kHz @ 8Ω	>400
Channel Crosstalk @ 1kHz	>75dB
Input connectors	Terminal block (Symmetrical)
Input CMRR/ref. Max. PWR	>50dB
Signal present indicator	Lit at -40dBV
Output connectors	Terminal block
Anticlip limiter	Soft / Mid / Hard
Volume remote control	(0-10VDC) (0.1A max.) 0V = no attenuation / +10V = full attenuation
Remote control connectors	Terminal block
Mains	Depending on your country. See characteristics in the back of the unit.
Power consumption	
(pink noise, 1/8 power @ 4ohm)	312VA
(pink noise, 1/3 power @ 4ohm)	685VA
Stand-by mains consumption	<3W
Panel Dimensions	482.6x88mm
Depth (Handles and knobs excluded)	373mm
Weight	12.9kg
Processing	
A/D & D/A	24 bit, 48kHz. 115dB AKM Codec
DSP	32/64 bits
Latency	2ms
Analog Input headroom	+18 dBV = +21dBu
Digital Input attenuator	Stepless from -∞ to +0dB
Input Impedance	Balanced, 22kΩ
Maximum Delay	1s (343.4m) for each channel
Delay resolution	20.8μs (6mm)
Compressor / Limiter	
Threshold	from -36dBV to +18dBV
Ratio	1:1 to ∞:1 (limiter)
Attack time	Auto or from 0.1ms to 500ms.
Release time	Auto or from 1ms to 5s.
Output peak voltage limiter	
Peak voltage upon model (auto settings)	From 10Vpk to 70Vpk
High & Low pass Crossover filters	Butterworth in 6/12/18/24dB/oct. Bessel in 12/18/24dB/oct. Linkwitz-Riley in 12/24dB/oct.
Parametric Eq types (8 max. per output)	Bypass / On-Off all channels Param. Eq. 20Hz-20kHz; -60/+12dB; Q from 0.3 to 200 Low & High Shelf 6/12 dB/oct

	Low & High Pass 6/12 dB/oct. All-Pass 1/2 order Sine (20Hz to 20kHz) Polarity (10/20Hz to 10/20kHz) White Pink
Built In signal generator	
Signal Mute	Yes
Signal Polarity Invert	Yes
Connectivity	Ethernet Base-Tx 10/100Mb, Auto X-Over, Cat5 RS232 57600 (fixed)-8-N-1-N
Software	<p>Realtime full GUI of all functions and controls through Ethernet with interactive graphical display</p> <p>Grouping mode channels or devices</p> <p>Automated report generation</p> <p>Remote power on with programmable delay.</p> <p>Up to 256 devices on same net.</p> <p>Autodiscovery devices feature</p> <p>Routing capability through NAT gateways.</p> <p>Real time metering at input/output (DSP)</p> <p>EclerNet Software</p> <p>Device "Finder" feature</p> <p>Save & Recall setup and preset functions</p> <p>Firmware update capability thru Ethernet</p> <p>Password protection</p> <p>Default Network configuration:</p> <p>IP: 192.168.0.100</p> <p>Mask: 255.255.255.0</p> <p>Gate: 192.168.0.1</p> <p>UDP Port: 2210</p>
Operating System	Windows® 10; W8.1; W8; W7; Vista (SP1); XP Prof. (SP3); W2000 Prof. (SP4) Pentium IV @ 2GHz 500MB RAM
Minimum EclerNet System Requirements	100MB HDD free space 1024x768 pixels & 16bits color display 10/100/1000 Ethernet Network card