

# Synexis C10

Charger



## FEATURES

- Ten charging compartments for beltpack receivers/transmitters
- Mains powered
- LED display for operation
- Rugged metal housing, 19", 3 U

## COMPONENTS

Synexis C10    Ten charging compartments  
for beltpack receivers /  
transmitters . . . . . Order # 722.294

## SUPPLIED ACCESSORY

- Power cable

## APPLICATIONS

The Synexis C10 charger is provided with 10 charging compartments for Synexis TP beltpack transmitters or RP beltpack receivers, when they are powered with rechargeable NiMH batteries. The charging state of the rechargeable batteries is indicated by an LED of the appropriate transmitter or receiver.

## TECHNICAL SPECIFICATIONS

AC input . . . . .	100 - 240 V, 50/60 Hz
Fuse . . . . .	2 x T 2A L 250V
Connection . . . . .	AC input and AC output socket
Switching power supply input . . . . .	100 - 240 V AC, 50/60 Hz
Switching power supply output . . . . .	5 V DC, 12 A
Full loading current . . . . .	593 mA (115 V) / 356 mA (230 V)
Max. charging time . . . . .	approx. 5 hours
Ambient temperature (26 °C / 55%) . . . . .	46 °C [114.8 °F]
Dimensions (W x D x H) . . . . .	482 x 239.6 x 141.9 mm [19" x 9.4" x 5.6"]
Weight . . . . .	4.67 kg [10.3 lbs]
Charging compartments . . . . .	10 for beltpack transmitter/receiver

# Synexis C10

## ARCHITECT'S SPECIFICATIONS

Charger with charging compartment for 10 beltpack receivers/transmitters. Automatic rechargeable battery/standard battery recognition. With power on LED. Each charging compartment with individual display of the charging or error status via the operating control LED of the transmitter/receiver. 19"/3 U mounting. Integrated power supply. Rugged, closed metal housing.


Manufacturer: beyerdynamic  
Type: Synexis C10

## CONSUMER ALERT

Most users do not need a license to operate this wireless microphone system. Nevertheless, operating this microphone without a license is subject to certain restrictions: the system may not cause harmful interference; it must operate at a low power level (not in excess of 50 milliwatts); and it has no protection from interference received from any other device.

Purchasers should also be aware that FCC is currently evaluating use of wireless microphone systems, and these rules are subject to change. For more information, call the FCC at 1-888-CALL-FCC (TTY: 1-888-TELL-FCC) or visit the FCC's wireless microphone website at [www.fcc.gov/cgb/wirelessmicrophones](http://www.fcc.gov/cgb/wirelessmicrophones).

## DIMENSIONS

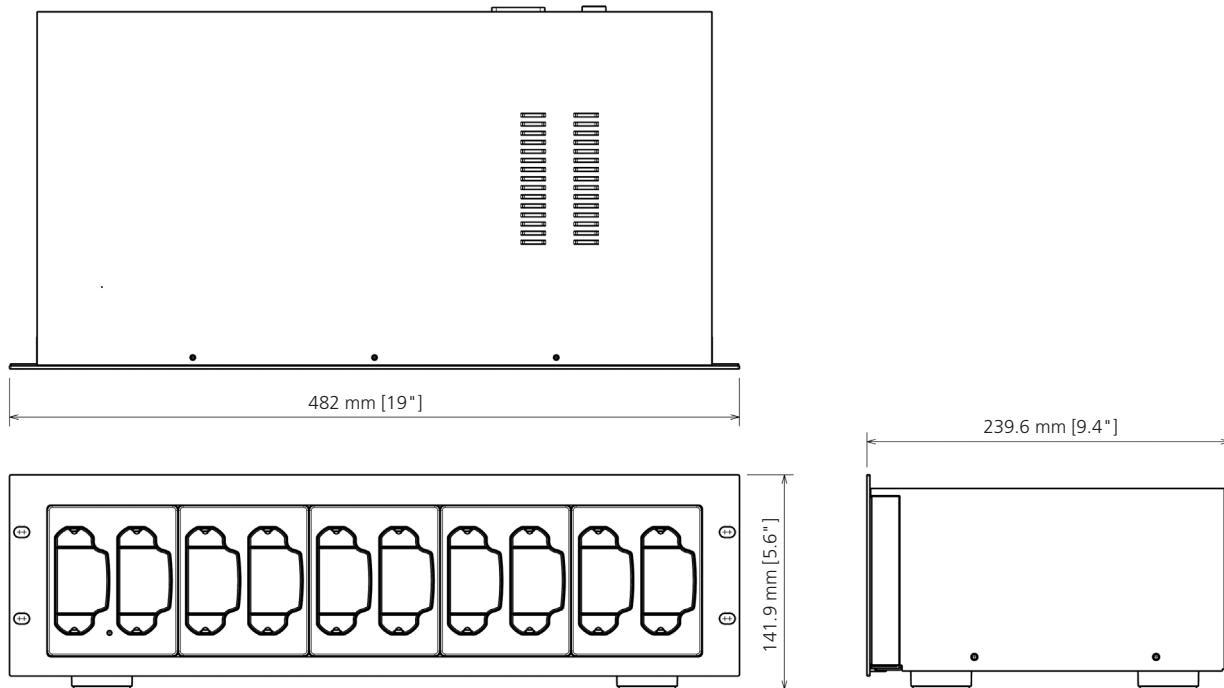

All dimensions in mm and [inch].

2 of 2

beyerdynamic GmbH & Co. KG  
Theresienstr. 8 | 74072 Heilbronn – Germany  
Tel. +49 (0) 71 31 / 617 - 0 | Fax +49 (0) 71 31 / 617 - 204  
[info@beyerdynamic.de](mailto:info@beyerdynamic.de) | [www.beyerdynamic.com](http://www.beyerdynamic.com)

For further distributors worldwide, please go to [www.beyerdynamic.com](http://www.beyerdynamic.com)  
Non-contractual illustrations. Contents subject to change without notice. E1 / Synexis C10 (09.10)

**beyerdynamic**)))