

## MPAGE16

---

### PAGING STATIONS

#### *Desktop Paging Station*



### PRODUCT OVERVIEW

MPAGE16 is a digital paging station compatible with the MIMO88 and MIMO88SG matrices. It features 21 touch-sensitive keys that, together with the MIMO hardware, allow for an easy, flexible and user-friendly configuration of a paging system that can coexist with other MIMO functions and with other control hardware and/or software control systems, like the WPmSCREEN, WPTOUCH or TP-NET.


### KEY FEATURES

- 16 zone selection keys
- SELECT ALL, CLEAR and PAGE keys
- Two user-defined functions keys (for recalling presets, grouped zones selection, GPOs activation, etc.)
- Gooseneck integrated microphone
- Several MPAGE16 or software (virtual) paging stations can work simultaneously (priorities and zones availability is managed by the MIMO88 MIMO88SG software setup)

### APPLICATIONS

- Paging, voice messages and speech

## MECHANICAL DIAGRAMS

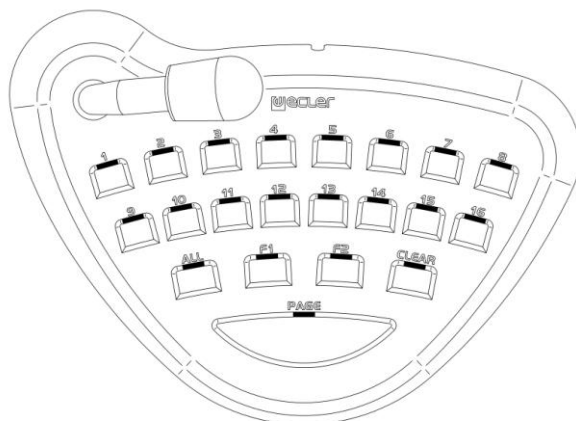

## TECHNICAL DATA

<b>Microphone type</b>	Non-removable gooseneck condenser microphone
<b>Polar pattern</b>	Cardioid
<b>Microphone frequency response</b>	50Hz – 18KHz (-10dB)
<b>Output level</b>	-10dBV @ 104dB SPL
<b>Maximum audio cable length</b>	Twisted pair 20m, Shielded 800m
<b>Keyboard type</b>	Capacitive with self-calibration
<b>Number of paging zones</b>	16
<b>Additional control keys</b>	F1,F2, All, Clear
<b>Indicators</b>	Bicolor LED on all keys
<b>Audio + control connector</b>	Detachable Euroblock, 6 pole
<b>Control protocol</b>	ER-BUS
<b>Maximum control cable length</b>	800m
<b>Power supply</b>	+7 to +16V
<b>Maximum power consumption</b>	100mA
<b>Phantom power supply</b>	7 to 16 VDC (100 mA consumption)
<b>Dimensions (microphone excluded)</b>	W 216mm x D 157mm x H 46mm
<b>Weight</b>	700 g
<b>Included accessories</b>	Windscreen, connector