


# 100V Adaptor for Audica Professional loudspeakers

# AUDICA

## SPECIFICATION SHEET



100V Adaptor

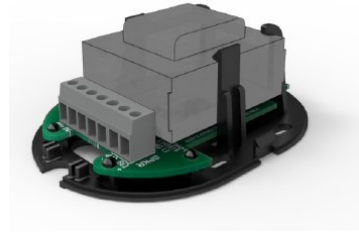

100V Adaptor with cover removed



100V Adaptor with MICROPpoint

### Product description:

The 100V Adaptor is an extremely high quality audio transformer that facilitates the use of Audica Professional MICROseries loudspeakers with 100V line systems. Designed to complement the design of the MICROPpoint and MICROline for on-wall use, the Adaptor can also be used above the ceiling void with the MICROPpoint.

When used with Audica MICROseries loudspeakers, the audio signal must still be used with a MICROzone, MULTIZone or DSP programmed with the MICROseries Eq. The equalized signal can then be fed to a 100V power amplifier to provide the power to the 100V Adaptors connected to the Audica MICROseries loudspeakers.

Connections allow the unit to be matched to 4 Ohm and 8 Ohm loudspeakers and tapping links provide for 2W, 4W, 8W and 16W output. The unit has been designed for quick and simple installation and is available in black or white finishes that match the black and white of the MICROseries loudspeakers. The Adaptor is available in packs of 4 units.

Product	100V Adaptor
Loudspeaker connections	4 Ohm and 8 Ohm
Transformer tapping	2W, 4W, 8W and 16W
Dimensions	96 mm x 71 mm x 46 mm
Packed and sold in multiples of	4 units
Colour	Black or white

