



LUCIA® 120/2



- ▶ **Maximum output power across range of loads** – 2 x 60 W into 8, 4 or 2 ohms
- ▶ **Digital front end** – Firmware controlled multi-band compressor and look-ahead limiter
- ▶ **GPIO** – Remote control (e.g. wall panel) for channel switching, level control and integration with paging systems
- ▶ **Compact form factor** – Half-rack, 1U chassis and supplied bracket for discreet on-wall mounting (e.g. behind display screens)
- ▶ **Efficient Class D amplifier** – Patented design for low distortion and minimal heat dissipation
- ▶ **Auto Load Sense™** – Proprietary auto-set VPL™ (Voltage Peak Limiter) for optimum performance with any connected load
- ▶ **Fail-safe operation** – Comprehensive short circuit, thermal, and under-voltage protection
- ▶ **Universal power supply** – Operates at 100 - 240 V AC (50 or 60 Hz)
- ▶ **ENERGY STAR® qualified¹** – Conforms to latest specification energy efficiency standards
- ▶ **Intelligent fan control** – Silent operation at idle and at lower output levels

Great sound, flexibility and ease of use

Lab.gruppen's innovative LUCIA (Localized Utility Compact Intelligent Amplification) brings enhanced audio performance and extraordinary flexibility to a decentralized approach in AV systems design. Power, processing, control and I/O are conveniently placed exactly where they are needed. In many AV applications requiring premium audio, LUCIA offers a logical, cost-efficient and scalable solution that eliminates the complications and added expense of a centralized equipment room for amplification, matrixing and processing. All LUCIA amplifiers incorporate a digital, firmware-controlled front end coupled to a robust, durable and highly efficient Lab.gruppen output stage.

Fast installation, reliable operation

LUCIA amplifiers install quickly and easily, with the supplied wall-mount bracket enabling discreet on-wall placement behind video displays. All connections are via Euroblock screw terminals, and level setting is available on front-panel potentiometers. An advanced protection scheme protects the amplifier and connected loudspeakers from potential damage caused by clipping, thermal overload, or extreme low line voltage.


Green credentials

LUCIA amplifiers are ENERGY STAR qualified¹, making them an ideal choice for installation in projects seeking energy efficient certifications. The amplifiers automatically enter standby mode after a 20 minute period with no signal input, consuming less than 1 watt. Automatic power-up occurs within two seconds after an input signal is sensed.

¹ Performance meets all criteria; certification pending.

Applications

- Retail outlets
- Bars & restaurants
- Entertainment venues
- Corporate board rooms
- Classrooms
- Multimedia spaces
- Hotel reception/lobbies
- Museums & galleries
- Small corporate event spaces

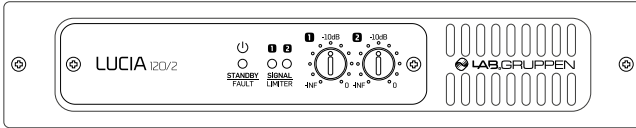

Specifications LUCIA 120/2

General	
Number of powered channels	2
Total output all channels driven	120 W
Max output voltage per channel ¹⁾	31 V peak
Max. output current per channel	5.5 Arms
Max. Output Power (all ch.'s driven)	
2 ohms	60 W
4 ohms	60 W
8 ohms	60 W
16 ohms	30 W
Performance	
THD 20 Hz - 20 kHz at 1 W into 8 ohms	<0.3%
THD at 1 kHz and 1 dB below clipping	<0.2%
Signal To noise ratio into 8 ohms	>98 dBA
Channel separation (Crosstalk) at 1 kHz	>60 dB
Frequency response	5 Hz - 22 kHz
Input impedance	10 kOhm
Input common mode rejection, CMR	40 dB
Gain, Sensitivity and Limiters	
VPL for 16 ohm mode	31 V
VPL for 8 ohm mode	31 V
VPL for 4 ohm mode	22 V
VPL for 2 ohm mode	15 V
Sensitivity, balanced input	4 dBu / 1.23 Vrms
Sensitivity, RCA input	-2 dBu / 0.62 Vrms
Input headroom for clip, balanced ²⁾	12 dBu / 3.09 Vrms
Input headroom for clip, RCA ²⁾	6 dBu / 1.55 Vrms
Connectors and switches	
Input connectors (per ch.)	3-pin detachable screw terminals, electronically balanced
Input connectors (ch 1 & 2)	Unbalanced RCA type
Output connectors (per ch.)	2-pin detachable screw terminals
GPI (power control input) ³⁾	2 channels of voltage sense type. 4 pins in a detachable screw terminal. Default for gain.
GPO (power state output) ³⁾	Contact closure type, 2 pins in a detachable screw terminal
USB	Default for external monitoring of fault/protection/power off
Cooling	For firmware update and configuration for the matrix models
Auto mode	One fan, no filter required, front-to-rear airflow, temperature controlled speed
Level adjustment (per channel) ³⁾	Can stay off if the sustained power average stays below 2 x 6 W and the surrounding temperature is below 25 degrees C
Auto mode	The power state is controlled automatically with the audio signal
Level adjustment (per channel) ³⁾	Front panel potentiometer, detented from -inf to 0 dB
Power	
Nominal voltage	100 - 240 VAC
Operating voltage	85 - 265 VAC
Standby consumption	<1 W
Mains connector	IEC inlet
Dimensions	
Weight	W: 216 mm (8.5"), H: 44 mm (1.7"), D: 280 mm (11")
Finish	1.9 kg (4.2 lbs.)
Approvals	Black aluminum front and black steel chassis
Warranty	CE, CSA, CCC, PSE, FCC, ENERGY STAR
	3 years, components and factory workmanship. See full warranty statement.

Note 1): Into 8 ohms and higher

Note 2): An analog soft limit will be engaged on the input above this level to reduce the clip distortion

Note 3): Can be configured for different functionality via USB

All specifications are subject to change without notice.