

**SL-D930**



**Stunning Sound from Compact Body  
A Retro-cool 2.1ch Bluetooth® Speaker with CD/Radio**

■ **Main Features**

- >Wireless connection from Smartphones, Tablets, and Laptops via Bluetooth®
- >2.1ch Speaker System with Individual Speaker Chambers
- >Top-loading CD Player compatible with CD/CD-R/RW, and MP3/WMA formats
- >AM/FM Tuner with 20AM/20FM Preset Stations (RDS for UK/EUR models)
- >Convenient On/Off Timer with Snooze, Digital Clock with 2-step dimmer, and Sleep Timer
- >High Performance and Power Efficient Class-D Amplifier
- >Front-located Headphone jack and AUX In jack

Brand	TEAC			
Series	Compact Audio			
Model No.	SL-D930-R (Red)	SL-D930-B (Black)	SL-D930-W (White)	SL-D930-S (Silver)
UPC Code	043774030361	043774030354	043774030385	043774030378
EAN Code	4907034218288	4907034218271	4907034218301	4907034218295
Overall Dimensions/NW W x H x D	340 x 190 x 230 / 5.1 (mm/kg) 13.4" x 7.5" x 9.1" / 11.3 (inch/lbs)			
Package Dimensions/GW W x H x D	400 x 265 x 286 / 6.6 (mm/kg) 15.7" x 10.4" x 11.3" / 14.6 (inch/lbs)			

This document contains pre-release information which should not be released to the public before the "Launching Date". Specifications and contents are subject to change without notice. Please check the TEAC website or TCJ sales department for the latest information, before you publish the information to the public.

## ■Plays back various music sources including Bluetooth®

### Wireless Music Playback from Smartphones and Tablets via Bluetooth®

The SL-D930 allows you to playback music files wirelessly from your Smartphones or Tablets via Bluetooth connection, so that you can continuously enjoy music with the SL-D930, when you come back to your home from office, school or shopping. Up to 8 Bluetooth devices can be memorized by *PAIRING* which is a method to establish connection between two devices wirelessly. Once you paired your Smartphone or Tablet to the SL-D930, you can connect again with a touch of button.



### CD Player supports MP3/WMA files on CD-R/RW, as well as conventional Audio CD.

The SL-D930 also employs a top-loading CD player that plays back conventional audio CD (CD-DA), as well as MP3/WMA formats on CD-R/RW discs, supporting versatile playback modes – up to 32 tracks program play, repeat play (1/All for CD, 1/All/Folder for MP3/WMA), shuffle play, and intro play. With MP3/WMA files, file information\* such as song title, artist name, and album name can be displayed on the LC-Display.

\* 2-byte characters are not supported to display.

### Retro-cool design that matches Vintage Furniture

Design ideas from the SL-D930 are inspired from 1950s American Classic Cars, — streamlined shape, and shining chrome trims. Not only with mid-century furniture from 50s, the SL-D930 matches with contemporary furniture as well, to stand out its pop design.

Exterior color is available from 4 colors, red, black, white and silver. The self-standing color-keyed remote control that corresponds main unit's color equips frequent-used keys such as Bluetooth Pairing and Sleep Timer, as well as volume control and CD/Tuner operation.



### PLL Synthesized AM/FM Stereo Tuner

PLL synthesized AM/FM stereo tuner is employed, with up to 20AM + 20FM station memory, and auto/manual tuning. On the UK/EUR models, RDS PS/PTY/RT/CT functions are available.

### On/Off Timer with Snooze and Sleep Timer, for daily-use

The SL-D930 also employs On/Off Timer which is suitable for a personal audio. The On/Off Timer wakes the unit up at the desired time, with specified audio source and specified volume level, and goes to Standby when Off Time comes. Snooze function repeats alarm 5 minutes later. The SL-D930 also equips sleep timer up to 90 minutes. This is an ideal product for bed-side clock, as the LC-display with 2-step dimmer shows digital clock even the SL-D930 is in standby mode.

This document contains pre-release information which should not be released to the public before the "Launching Date". Specifications and contents are subject to change without notice. Please check the TEAC website or TCJ sales department for the latest information, before you publish the information to the public.

## ■ Breakthrough Sound that changes your thoughts on compact audio unit

### 2.1ch Speaker System with Bass-reflex type built-in down-fire Subwoofer

The SL-D930 employs TEAC's legendary 2.1ch speaker system that achieves stunning hi-fi sound and changes your thoughts on compact audio unit. A combination of 65mm (2.5") speaker units for front, and 80mm (3.2") for down-fire Subwoofer generates full-bodied sound with low gravity. In spite of its size of the unit, you will enjoy wide-spread sound wherever you are in a room.



### Individual Speaker Chambers for Front Speakers and Subwoofer

The SL-D930 employs individual closed type chambers for Front speakers and Bass-reflex type chamber for down-fire Subwoofer. Each chamber is robust and independent from others, in order to achieve pure and three dimensional sound by eliminating interference from others. A 1.6 liter (approximately 100 cubic inch) chamber for subwoofer is particular, it generates rich bass sound with its extra-thick ABS plastic enclosure that endures hard vibration which is generated by subwoofer itself. These hidden but courteous design and build let you enjoy stunning bass sound.



### High performance and high output power Class-D amplifier

Thanks to newly designed Class-D amplifier, it performs stunning sound with high energy-efficient drive that matches environmental concern in today. Of course, sound quality is not sacrificed to achieve low power consumption.

### Adjustable Subwoofer level

A Subwoofer level control allows users to adjust bass sound level as required. With minimum subwoofer level, the sound from subwoofer will be cancelled, which is suitable for late-night listening.

## Features at-a-glance

- Wireless connection from Smartphones, Tablets and Laptops via Bluetooth
- 2.1ch Speaker System with a Built-in down-fire Subwoofer
- Individual Speaker Chambers for Front Speakers and Subwoofer
- User-adjustable Subwoofer Level Control
- High performance Class-D Amplifier for total 20 watts Output Power (Front 5W+5W, Subwoofer 10W)
- Top-loading CD Player compatible with CD-R/RW discs and MP3/WMA files.
- PLL Synthesized AM/FM Stereo Tuner with 20AM/20FM Preset Station Memory (RDS for UK/EUR models)
- On/Off Timer with Snooze, and Sleep Timer
- Digital Clock with 2-step Dimmer (12H/24H selectable)
- Convenient Front-located Headphone Jack and AUX Input (audio cable included)
- Available in Red, Black, White and Silver, with color-keys remote control

## Specifications

### Bluetooth® section

Bluetooth® version	3.0
Bluetooth® class	Class2 (max range 10m / 33ft.)
Supported Profile	A2DP, AVRCP
Supported Codec	SBC
Contents Protection System	SCMS-T

### CD section

Supported Disc	CD-DA (12/8cm)、CD-R/RW
Supported Formats	PCM, MP3, WMA
PCM	16 bit, 44.1 kHz
MP3	MPEG 1/2 Audio Layer-3
Extension	.mp3
Bit-rate	8 k to 320 kbps
Sampling Frequency	16 k to 48 kHz
WMA	Windows Media Audio Standard (DRM not supported)
Extension	.wma
Bit-rate	48 k to 192 kbps
Sampling Frequency	32 k, 44.1k, 48 kHz
Max Number of Folders	99
Max Number of Files	999
Frequency Response	20 Hz to 20,000 Hz (±1.0 dB)
Wow and Flutter	Below measureable limit

### Tuner section

Tuner Type	PLL Synthesized Tuner
Frequency Range	
AM	530 kHz to 1,720 kHz
FM	87.5 MHz to 108.0 MHz
Number of Presets	20 AM + 20 FM

### Audio Input

AUX IN	1/8" (3.5mm) Stereo Mini Jack
--------	-------------------------------

### Headphone Output

PHONES	1/8" (3.5mm) Stereo Mini Jack
--------	-------------------------------

### Amplifier section

Rated Output Power	
Front (L, R)	5 W + 5 W
Subwoofer	10 W


### Speaker section

Front (L, R)	65 mm (4 ohms) Closed type
Subwoofer	80 mm (8 ohms) Bass-reflex type

### General

Operating Power	AC 120V, 60 Hz (US/Canada) AC 230V, 50 Hz (UK/Europe) AC 120/230V, 50/60Hz (Brazil)
Power Consumption	20 W
Overall Dimensions	340W x 190H x 230D mm 13.4" W x 7.5" H x 9.1" D
Net Weight	6.6 kg / 14.6 lbs.
Accessories	Remote Control (RC-1311) Batteries for Remote Control (AAA) x 2 Battery for Backup (CR2032) Stereo Mini Plug Cable Owner's Manual, Warranty Card

## ■ Rear Panel

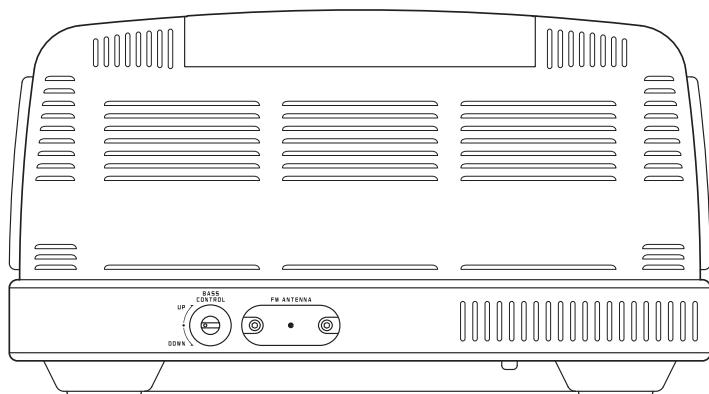

This document contains pre-release information which should not be released to the public before the "Launching Date". Specifications and contents are subject to change without notice. Please check the TEAC website or TCJ sales department for the latest information, before you publish the information to the public.